

# EDGE CONNECTORS


HC-Series



Type No.	No. Of Contacts	Dimensions			
		A	B	C	D
HC - 6	6	47.4	38.9	31.8	27.9
HC - 10	10	63.0	53.0	47.6	45.4
HC - 12	12	69.3	62.7	55.6	51.8
HC - 16	16	84.7	78.4	71.2	68.1
HC - 18	18	94.5	86.5	79.2	76.6
HC - 22	22	108.8	102.4	95.1	91.4

Parameters	
Type	PCB Connector with bellows Contact
No. Of Contacts	6 , 10 , 16 , 12 , 18 and 22
Rated Current	5 Amp. at 300 Volts rms
Contact Resistance	10 m Ohms. max. (initial)
Insulation Resistance	1000 M Ohms min.
H.V. Break Down Test For 1 Minute	1.5 KV
Contact Termination	Solder / PCB Mountable
Card Thickness	1.42 mm - 1.8 mm
Mechanical Life	500 Cycles min.
Temperature	-20 to + 85 <sup>0</sup> C
Material : Body :	Polycarbonate / PBTP
Contacts :	Phosphor Bronze , Gold , Silver or Tin Plated

**Edge Connectors      Single Sided Bellow Contacts (Polycarbonate / PBTP)**

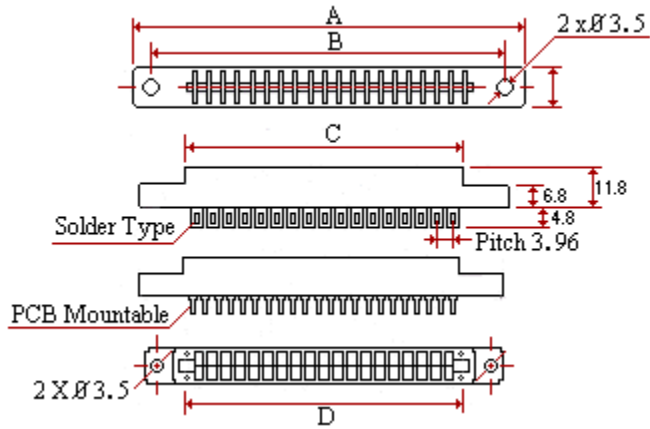

### HOW TO ORDER

HC-	10-	G
Series	No.Of Pins	G-Gold Plated T-Tin Plated



### Indian Technological Products Private Limited

22-23, Type-B, Hartron Complex, Electronic City, Sector-18, Udyog Vihar, Gurgaon -122 016, Haryana (India)

Telephone: +91-124-4013646, 4013647 • Fax: +91-124-2398277

Email: sales@itpindia.in • [www.itpindia.com](http://www.itpindia.com) • CIN: U74899DL1986PTC023265