


Fuse Glass (6.3x32 mm) Fast Blow (RQC)

**RQC 6.3 x 32 mm Fuses are Low Breaking Capacity Quick Acting Fuses
Manufactured As Per CEI/ IEC 127-2**

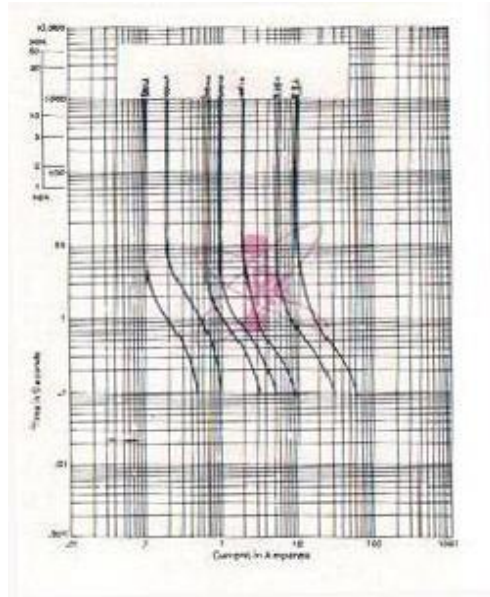

Mechanical Dimensions

| Dimensions | Milimeter | |
|------------|---------------------|--|
| Diameter | 6.35 ± 0.1 | |
| Length | $31.8 + 0.7 / -0.8$ | |

Electrical

Characteristics

| Rated Current | 2 In | | 2.75 In | | 4 In | | 10 In |
|---------------------------|--------|-------|---------|------|--------|-------|-------|
| | Max. | Min. | Max. | Min. | Max. | Max. | |
| 50 mA to 100mA(Inclusive) | 20 sec | 2 ms | 200 ms | 1 ms | 30 ms | 5 ms | |
| Above 100mA to 6.3 Amp | 20 Sec | 20 ms | 1500 ms | 8 ms | 400 ms | 80 ms | |

| Part Number | Current Rating |
|-------------|----------------|
| RQC-100 | 100 mA |
| RQC-125 | 125 mA |
| RQC-150 | 150 mA |
| RQC-200 | 200 mA |
| RQC-250 | 250 mA |
| RQC-300 | 300 mA |
| RQC-315 | 315 mA |
| RQC-350 | 350 mA |
| RQC-400 | 400 mA |
| RQC-500 | 500 mA |
| RQC-630 | 630 mA |
| RQC-800 | 800 mA |
| RQC-1 | 1 A |
| RQC-1.25 | 1 A 25 |
| RQC-1.5 | 1 A 5 |
| RQC-1.6 | 1 A 6 |
| RQC-2 | 2 A |
| RQC-2.5 | 2 A 5 |
| RQC-3 | 3 A |
| RQC-3.15 | 3 A 15 |
| RQC-4 | 4 A |
| RQC-5 | 5 A |
| RQC-6.3 | 6 A 3 |
| RQC-8 | 8 A |
| RQC-10 | 10 A |