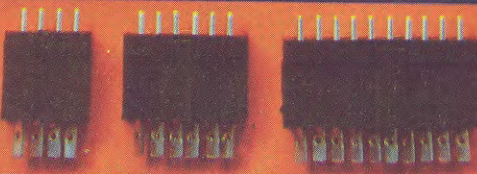
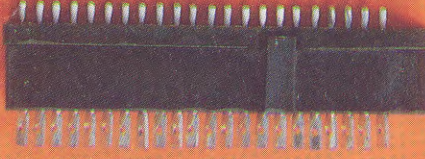
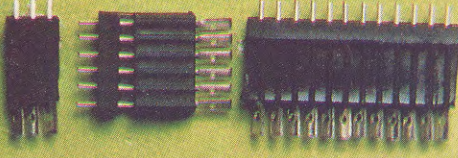
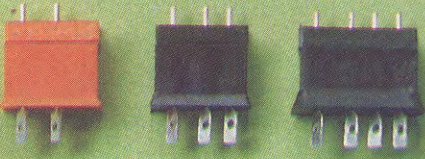
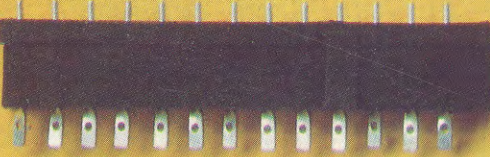
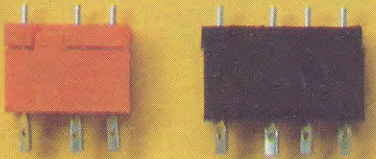
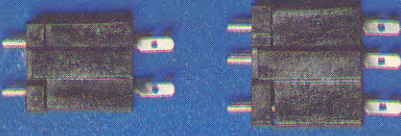
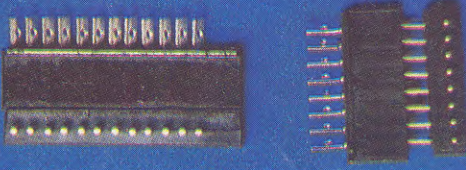
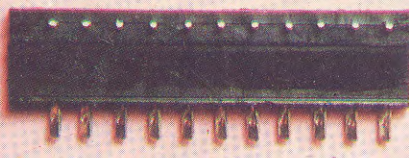
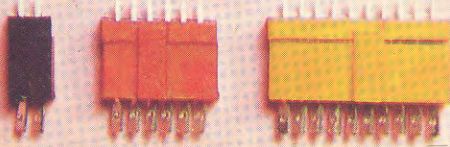


Series	CONNECTOR	TYPE (MALE & FEMALE)	Range No. of Contacts	Pitch (mm)	Pin Dia (mm)	Current (Amps)	Voltage (Volts)
S401		STRAIGHT CONNECTOR	1,2,3,4,5, 6,7,8,9,10	2.5 mm	1.0 mm	2	50
S402		STRAIGHT CONNECTOR	12,14,15,16, 18,20,22,24	2.5 mm	1.0 mm	2	50
S-2540		STRAIGHT CONNECTOR	2,3,4,5,6,7,8,10,12,14 15,16,18,20,22,24,26	2.54 mm or 0.1"	0.8 mm	2	50
S403		STRAIGHT CONNECTOR	2,3,4	3.5 + 5.0 mm	1.0 mm	2	75
S451		STRAIGHT CONNECTOR	3,4,5,6,7,8,9,10, 11,12,13	5.0 mm	1.0 mm	2	250
S452		STRAIGHT CONNECTOR	2,3,4,5,6,7	5.0 + 7.5 mm	1.0 mm	2	250
S-453		STRAIGHT CONNECTOR	2,3,4,5,6	5.0 + 7.5 mm	1.57 mm	5	250
L502		RIGHT ANGLE CONNECTOR OR 'L' TYPE	3,4,5,6,7,8,10,12,14, 15,16,18,20,22	2.5 mm	1.0 mm	2	50
L552		RIGHT ANGLE CONNECTOR OR 'L' TYPE	3,4,5,6,7,8,10, 11,12,13	5.0 mm	1.0 mm	2	250
S 481 S 482		STRAIGHT CONNECTOR	2,3,4,5,6,7,8,10,12, 14,16,18,20,22,24	2.5 mm	0.8 mm	2	50