


# Fuse Glass (5x15 mm) with Leads Fast Blow (RQBEL/RQBELR)

RQBEL 5 X 15 mm Fuses are Low Breaking Capacity Fast Blow Fuses with Leads manufactured as per Reliance Auto Specifications based on IEC 127

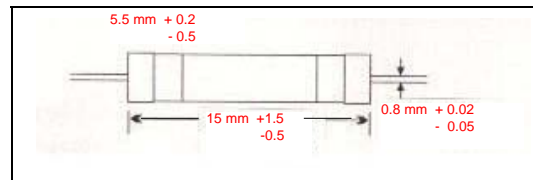

## Electrical Characteristics

Rated Current	2.1 In	2.75 In		4 In		10 In
	Max.	Min.	Max.	Min.	Max.	Max.
32 mA to 100mA(Inclusive)	30 min	10 ms	500 ms	3 ms	100 ms	20 ms
Above 100mA to 10 Amp	30 min	50 ms	2sec.	10 ms	300 ms	20 ms

Part Number	Current Rating
RQBEL-1	1 A
RQBEL-1.25	1 A 25
RQBEL-1.5	1 A 5
RQBEL-1.6	1 A 6
RQBEL-2	2 A
RQBEL-2.5	2 A 5
RQBEL-3	3 A
RQBEL-3.15	3 A 15
RQBEL-4	4 A
RQBEL-5	5 A
RQBEL-6.3	6 A 3
RQBEL-8	8 A
RQBEL-10	10 A

R Q B E L R

- Nil for Normal/R for ROHS
- With Lead
- 5 x 15
- Quick Blow
- Model