


STL(Z) 950 VERTICAL

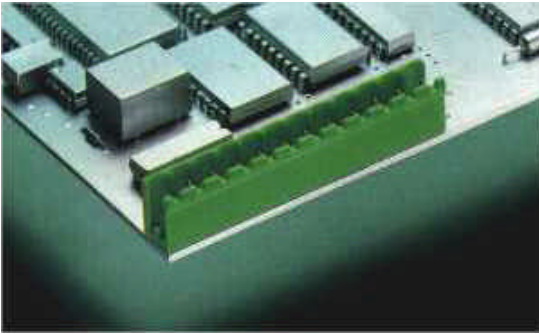

STL(Z) 950/.. - 5,0 (5,08) - V - green

2-24 poles, Spacing 5,0 mm or 5,08 mm
insert required no. of poles ..

Ratings:



UL 1059



CSA 22.2 No.158 DIN VDE 0627



Rated Voltage	250 VB	300 VB	250 V
Rated Current	15 A	16 A	12 A (T60)
Test Voltage			2,21 kV

Dimensions


Spacing	5,0 mm (5,08 mm)
PCB Hole Diameter	1,4 mm

Materials


Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact Pin	Cu

Colour

green	RAL 6018
-------	-----------------

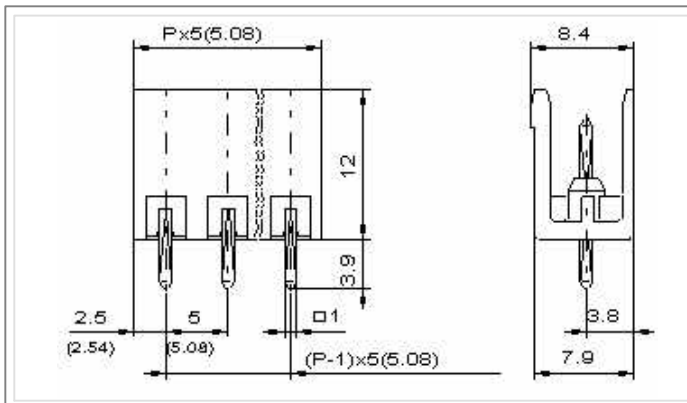

STL(Z) 950 HORIZONTAL

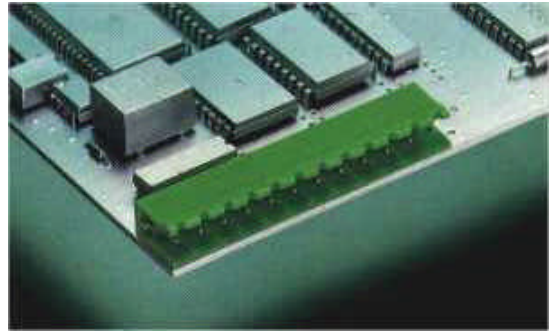

STL(Z) 950 / .. - 5,0 (5,08) - H - green

2-24 poles, Spacing 5,0 mm or 5,08 mm
insert required no. of poles ..

Ratings:



UL 1059



CSA 22.2 No.158 DIN VDE 0627



Rated Voltage	250 VB	300 VB	250 V
Rated Current	15 A	16 A	12 A (T60)
Test Voltage			2,21 kV

Dimensions

Spacing	5,0 mm (5,08 mm)
PCB Hole Diameter	1,4 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact Pin	Cu

Colour

green	RAL 6018
-------	-----------------

