FUSE HOLDER


FH - 10



TECHNICAL SPECIFICATIONS:

| Mounting Style | Panel |
|---------------------------------|---------------------------------------|
| Rated Current / Voltage | 2.5 Amps @ 250V AC |
| Fuse Link Size | 15.9 X 4.7 mm |
| App. Weight (Gm) | 6.0 . |
| Cap Design | Screw-In With Coin Slot . |
| Contact Resistance (Max.) | 10 m Ohms |
| Current Carrying Parts | Brass / Silver Plated . |
| H. V. Break Down | 2 KV/AC For 1 Minute . |
| Insulation Resistance | 1000 M Ohms |
| Material | Polyamide G.F |
| Panel Thickness | 0.8 X 2.5 mm |
| Permissible Temp. For Soldering | Soldering Time - 5 Sec. At 270 Deg. C |
| Projection Front Of Panel | 11.7 mm |
| Projection Rear Of Panel | 20.5 mm |
| Rated Voltage | 250V AC. |
| Temp. Withstand | 85 Deg. C |

DIMENSIONING:

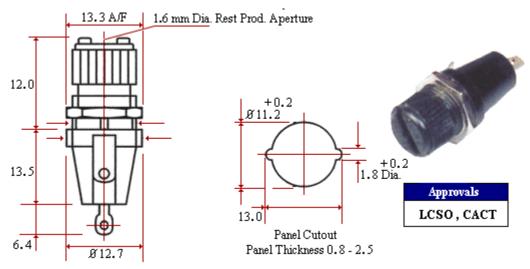

HOW TO ORDER:

| FH - 10 |
|-------------|
| Fuse Holder |