Fuse Glass (5x20 mm) Slow Blow (RTA)

RTA Fuses are Low Breaking Capacity Slow Blow/Time Lag Fuses Manufactured As Per CEI/ IEC 127-2 and JSS 51901 Specifications Style FA02-C

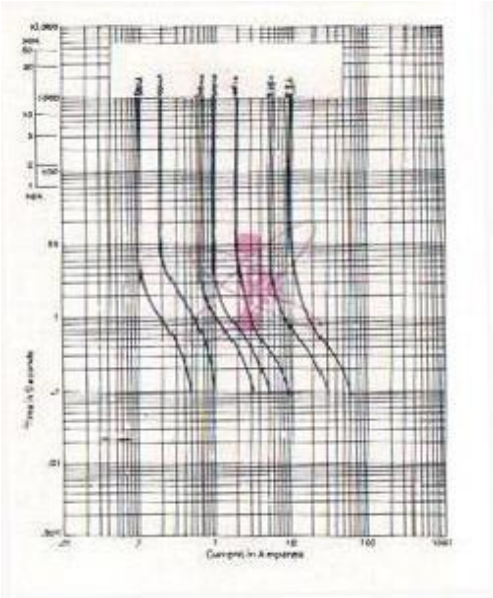

Mechanical Dimensions

Dimensions	Milimeter	
Diameter	5.20 + 0.1/ -0.2	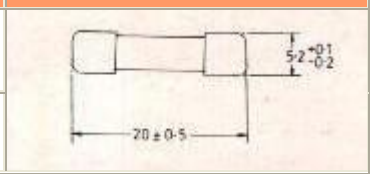
Length	20.00 ± 0.5	

Electrical Characteristics

Rated Current	2.1 In	2.75 In		4 In		10 In	
	Max.	Min.	Max.	Min.	Max.	Min.	Max
32 mA to 100mA(Inclusive)	2 min	200 ms	10 Sec	40 ms	3 Sec	20 ms	300 ms
Above 100mA to 10 Amp	2 min	600 ms	10 Sec	150 ms	3 Sec	20 ms	300 ms

Part Number	Current Rating
RTA-32	32 mA
RTA-40	40 mA
RTA-50	50 mA
RTA-63	63 mA
RTA-80	80 mA
RTA-100	100 mA
RTA-200	200 mA
RTA-250	250 mA
RTA-300	300 mA
RTA-315	315 mA
RTA-350	350 mA
RTA-400	400 mA
RTA-500	500 mA
RTA-630	630 mA
RTA-800	800 mA
RTA-1	1 A
RTA-1.25	1 A 25
RTA-1.5	1 A 5
RTA-1.6	1 A 6
RTA-2	2 A
RTA-2.5	2 A 5
RTA-3	3 A
RTA-3.15	3 A 15
RTA-4	4 A
RTA-5	5 A
RTA-6.3	6 A 3
RTA-8	8 A
RTA-10	10 A