


Fuse Glass (5x20 mm) Fast Blow (RQB)

**RQB (5 x 20 mm) Fuses are Low Breaking Capacity Quick Acting Fuses Manufactured As Per CEI/IEC 127-2 and JSS 51901 Specifications Style FA02-A.**

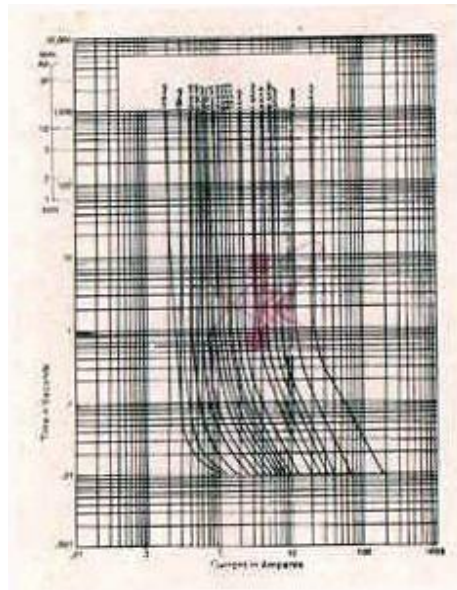

**Mechanical Dimensions**

Dimensions	Milimeter	
Diameter	5.20 + 0.1/ -0.2	
Length	20.00 ± 0.5	

**Electrical Characteristics**

Rated Current	2.1 In	2.75 In		4 In		10 In
	Max.	Min.	Max.	Min.	Max.	Max.
32 mA to 100mA(Inclusive)	30 min	10 ms	500 ms	3 ms	100 ms	20 ms
Above 100mA to 10 Amp	30 min	50 ms	2sec.	10 ms	300 ms	20 ms

Part Number	Current Rating
RQB-100	100 mA
RQB-125	125 mA
RQB-150	150 mA
RQB-200	200 mA
RQB-250	250 mA
RQB-300	300 mA
RQB-315	315 mA
RQB-350	350 mA
RQB-400	400 mA
RQB-500	500 mA
RQB-630	630 mA
RQB-800	800 mA
RQB-1	1 A
RQB-1.25	1 A 25
RQB-1.5	1 A 5
RQB-1.6	1 A 6
RQB-2	2 A
RQB-2.5	2 A 5
RQB-3	3 A
RQB-3.15	3 A 15
RQB-4	4 A
RQB-5	5 A
RQB-6.3	6 A 3
RQB-8	8 A
RQB-10	10 A