


Fuse Glass (6.3x32 mm) Fast Blow (RQC)

**RQC 6.3 x 32 mm Fuses are Low Breaking Capacity Quick Acting Fuses
Manufactured As Per CEI/ IEC 127-2**

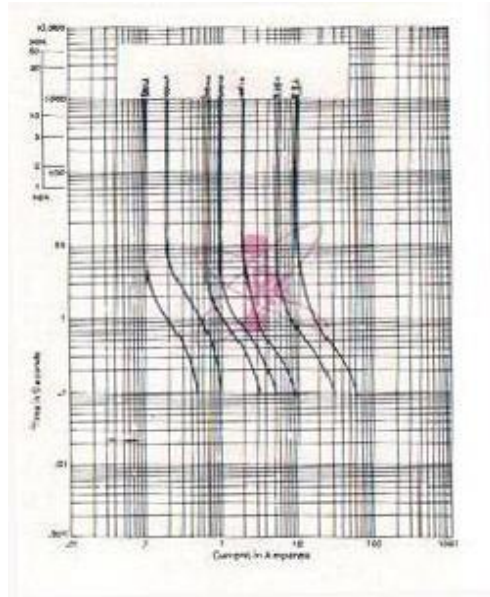

Mechanical Dimensions

Dimensions	Milimeter	
Diameter	6.35 ± 0.1	
Length	$31.8 + 0.7 / -0.8$	

Electrical

Characteristics

Rated Current	2 In		2.75 In		4 In		10 In
	Max.	Min.	Max.	Min.	Max.	Max.	
50 mA to 100mA(Inclusive)	20 sec	2 ms	200 ms	1 ms	30 ms	5 ms	
Above 100mA to 6.3 Amp	20 Sec	20 ms	1500 ms	8 ms	400 ms	80 ms	

Part Number	Current Rating
RQC-100	100 mA
RQC-125	125 mA
RQC-150	150 mA
RQC-200	200 mA
RQC-250	250 mA
RQC-300	300 mA
RQC-315	315 mA
RQC-350	350 mA
RQC-400	400 mA
RQC-500	500 mA
RQC-630	630 mA
RQC-800	800 mA
RQC-1	1 A
RQC-1.25	1 A 25
RQC-1.5	1 A 5
RQC-1.6	1 A 6
RQC-2	2 A
RQC-2.5	2 A 5
RQC-3	3 A
RQC-3.15	3 A 15
RQC-4	4 A
RQC-5	5 A
RQC-6.3	6 A 3
RQC-8	8 A
RQC-10	10 A