
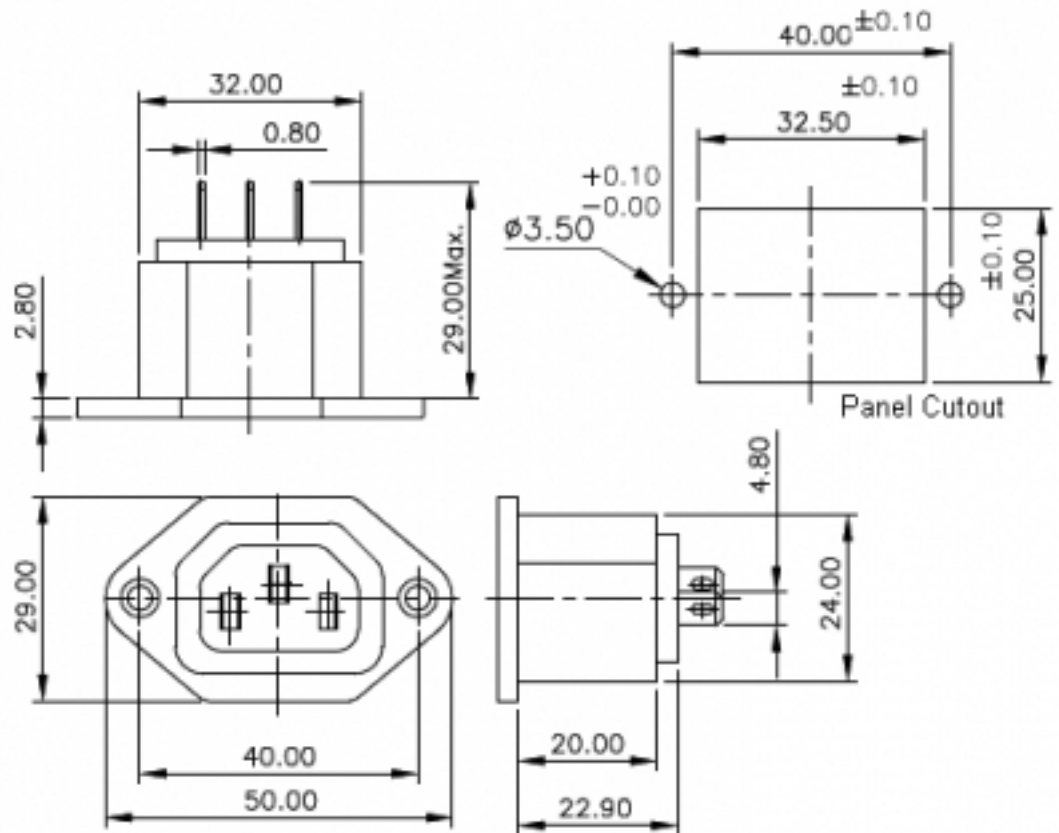


Approvals:   

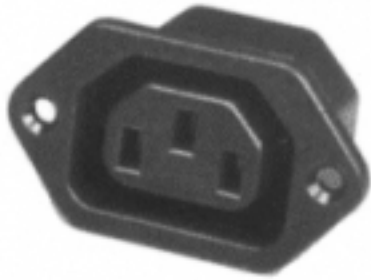

**Screw mounting IEC outlet**

**Specifications**

Mounting Style:	Panel, Screw-type
Terminals:	6.3 mm Quick Disconnect Tabs .
Reference Standard:	IEC 60320, UL-498
Permissible Temp With/Without Load:	0 deg. C to + 70 deg. C
Permissible Temp For Soldering:	270 deg. C for 5 sec. max.
Panel Thickness:	N.A.
Material - Terminals:	Copper alloy, Tin plated
Material - Body:	Nylon-6 GF 20%, V2
Insulation Resistance at 500 V DC:	1000 M ohms min.
H. V. Break Down Test:	2 KVAC
Contact Resistance (Initial):	20 m ohms max.
Current & Voltage Rating:	10 Amps (VDE), 15 Amp (UL, CSA) 250 VAC



**Indian Technological Products Private Limited**

22-23, Type-B, Hartron Complex, Electronic City, Sector-18, Udyog Vihar, Gurgaon -122 016, Haryana (India)

Telephone: +91-124-4013646, 4013647 • Fax: +91-124-2398277

Email: sales@itpindia.in • [www.itpindia.com](http://www.itpindia.com) • CIN: U74899DL1986PTC023265