


## Fuse Glass (5x20 mm) with Leads Slow Blow(RTAL)

**RTAL Fuses are Low Breaking Capacity Slow Blow Fuses with Leads manufactured as per Reliance Specifications based on IEC 127**

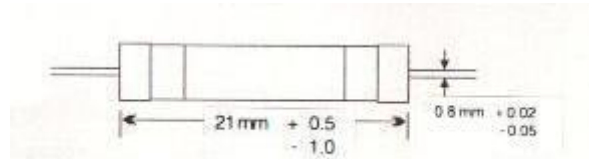

### Electrical

### Characteristics

Rated Current	2.1 In		2.75 In		4 In		10 In	
	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
32 mA to 100mA(Inclusive)	2 min	200 ms	10 Sec	40 ms	3 Sec	20 ms	300 ms	
Above 100mA to 10 Amp	2 min	600 ms	10 Sec	150 ms	3 Sec	20 ms	300 ms	

Part Number	Current Rating
RTAL-200	200 mA
RTAL-250	250 mA
RTAL-300	300 mA
RTAL-500	500 mA
RTAL-630	630 mA
RTAL-2	2 A
RTAL-2.5	2.5 A
RTAL-3.15	3.15 A
RTAL-4	4 A
RTAL-6.3	6.3 A