


Fuse Glass (6.3 x 32 mm) Slow Blow (RTC)

RTC Fuses are Low Breaking Capacity Slow Blow Fuses Manufactured As Per Reliance Specifications based on CEI/ IEC 127-2

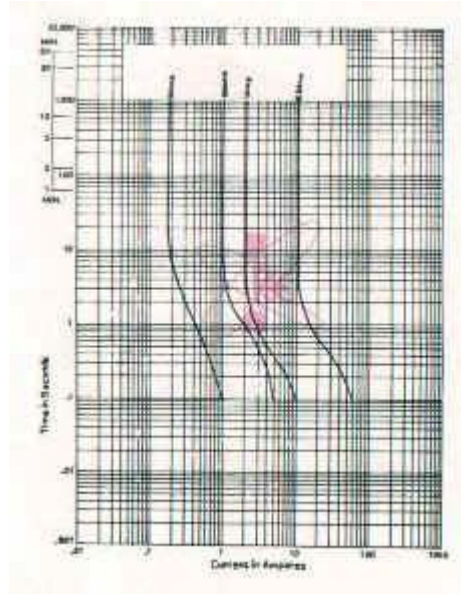

Mechanical Dimensions

Dimensions	Milimeter	
Diameter	6.35 ± 0.1	
Length	31.8 + 0.7/ -0.8	

Electrical Characteristics

Rated Current	2.1 In	2.75 In		4 In		10 In	
	Max.	Min.	Max.	Min.	Max.	Min.	Max.
32 mA to 100mA(Inclusive)	2 min	200 ms	10 Sec	40 ms	3 Sec	20 ms	300 ms
Above 100mA to 10 Amp	2 min	600 ms	10 Sec	150 ms	3 Sec	20 ms	300 ms

Part Number	Current Rating
RTC-32	32 mA
RTC-400	40 mA
RTC-500	50 mA
RTC-63	63 mA
RTC-80	80 mA
RTC-100	100 mA
RTC-200	200 mA
RTC-250	250 mA
RTC-300	300 mA
RTC-315	315 mA
RTC-350	350 mA
RTC-400	400 mA
RTC-500	500 mA
RTC-630	630 mA
RTC-800	800 mA
RTC-1	1 A
RTC-1.25	1 A 25
RTC-1.5	1 A 5
RTC-1.6	1 A 6
RTC-2	2 A
RTC-2.5	2 A 5
RTC-3	3 A
RTC-3.15	3 A 15
RTC-4	4 A
RTC-5	5 A
RTC-6.3	6 A 3
RTC-8	8 A
RTC-10	10 A